

HUSH


COLOUR 8808-64148

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.



COLOUR SCALE

Design no. 8808 Hush (170 cm/67") is available in 28 colours

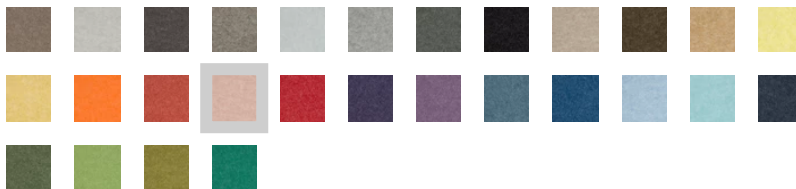

Hush is an exclusive non-woven polyester screen fabric with a felt-like texture. The fabric is designed specifically for use on vertical surfaces such as privacy screens, room dividers and wall coverings and it offers excellent acoustic properties. With its non-directional structure Hush provides optimum fabric utilization, a hassle-free production process and a first-class end result.

Meets Möbelfakta requirements

Design and colours are developed by Design Team Gabriel



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

8808 — Hush

Application

Panel

Screen

Composition

80% Polyester, 20% Viscose

Weight

290 g/lm — 9.35 oz/lin.yd

Width

170 cm — 67 inches

PERFORMANCE

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS 476 Part 7 class 1

ASTM E 84 Class 1(Adhered)

ASTM E 84 Class 1(Unadhered)

DIN EN 13501-1 B-s1,d0(glued)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

👉 AATCC 8 or 116 Dry/wet crocking

☀️ AATCC 16 Light fastness

 [ASTM E 84 Class 1\(Adhered\).](#) [ASTM E 84 Class 1\(Unadhered\).](#)

CERTIFICATES

ACOUSTIC TEST AIR FLOW RESISTANCE

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow resistance)		M104146/08	09 Feb 2015	PDF

ACOUSTIC TEST SOUND ABSORPTION

Test	Condition	No.	Date	Download
ISO 354 & ISO 11654 (sound absorption)		M104146/07	05 Feb 2015	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2019AN1889	03 Jul 2019	PDF
AATCC 16 Light fastness		2019AN1653	11 Jun 2019	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2019AN1889	03 Jul 2019	PDF
AATCC 8 or 116 Dry/wet crocking		2019AN1653	11 Jun 2019	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS 476 Part 7 class 1		82024	19 Jan 2017	PDF
ASTM E 84 Class 1(Adhered)	Adhered	24-002137	01 Oct 2024	PDF
ASTM E 84 Class 1(Unadhered)	Unadhered	3-54177-0	20 Dec 2023	PDF
DIN EN 13501-1 B-s1,d0(glued)	Adhered	24AN0170	31 Jan 2024	PDF

RESISTANCE TO BLEACH CLEANING

ACOUSTIC TEST AIR FLOW RESISTANCE

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		05 Oct 2020	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

CARE & MAINTENANCE

Regular gentle vacuum cleaning helps to preserve the fabric's attractive colour and appearance.