


STEP SCREEN

COLOUR 2304-62444

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

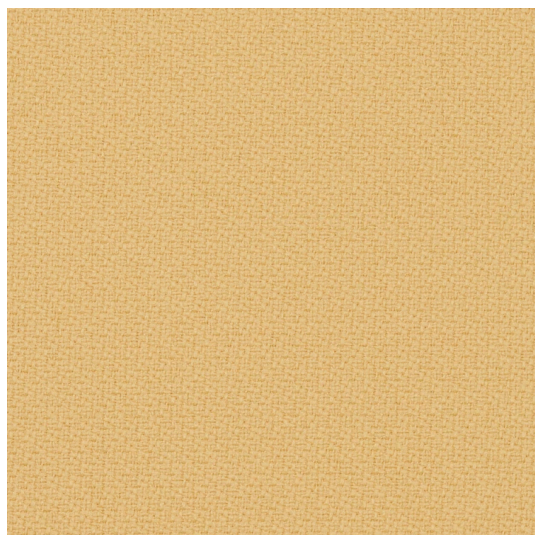

COLOUR SCALE

Design no. 2304 Step Screen (170 cm/67") is available in 24 colours



Step Screen is made from 100% Trevira CS polyester and is perfect for workplace and public areas with strict fire and safety regulations. Step Screen is designed for innovative room division solutions – from screens and panels to privacy pods. The fabric also comes in a melange version, Step Melange Screen. The colours of Step Screen and Step Melange Screen harmoniously complement each other as well as the colour palettes of upholstery textiles Step and Step Melange.

Meets Möbelfakta requirements

Designed by: Gabriel Design Team

Colours designed by: Maria Wolff Metternich



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2304 – Step Screen

Application

Panel

Screen

Composition

100% Trevira CS

Weight

440 g/lm – 14.19 oz/lin.yd

Width

170 cm – 67 inches

ENVIRONMENT

Environment, health, and safety

PERFORMANCE

Light fastness

6-8 – scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 – scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021 1&2 Cigarette and Match

DIN 4102 - B1

NF P 92-503/504/505 M1

Class Uno UNI 9175 Class 1 I EMME

DIN EN 13501-1 B-s1,d0(glued)

DIN EN 13501-1 B-s1,d0

Class Uno UNI 8456 - UNI 9174

Class Uno UNI 8457 - UNI 9174

Meets Möbelfakta requirements

VOC emission

Ansi/Bifma VOC test M7.1

Life Cycle Assessment (LCA)

LCA Summary Report

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.

CERTIFICATES

ACOUSTIC TEST AIR FLOW RESISTANCE

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow resistance)		B104146/65	16 May 2023	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2023AN1366	27 Jun 2023	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2023AN1830	07 Sep 2023	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/61004/05/23	16 May 2023	PDF
DIN 4102 - B1		230508	21 Jun 2023	PDF
NF P 92-503/504/505 M1		230508	21 Jun 2023	PDF
Class Uno UNI 9175 Class 1 I EMME		230508	21 Jun 2023	PDF
DIN EN 13501-1 B-s1,d0(glued)		23AN1145	30 May 2023	PDF
DIN EN 13501-1 B-s1,d0		Z-56.25-3573	09 Oct 2023	PDF

ACOUSTIC TEST AIR FLOW RESISTANCE

Class Uno UNI 8456 - UNI 9174	LSFIRE/NC19085/00000/01	07 May 2024	PDF
Class Uno UNI 8457 - UNI 9174	LSFIRE/NC19085/00000/01	07 May 2024	PDF

VOC EMISSION

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		961098-C	24 Jan 2024	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		21 Aug 2023	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			31 May 2023	PDF

LIFE CYCLE ASSESSMENT (LCA)

Test	Condition	No.	Date	Download
LCA Summary Report			22 Oct 2024	PDF

CARE & MAINTENANCE

Wiping down with water.

Step Screen is made of Trevira CS which is a polyester material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)